



LAINOX®

Cooking System

REGENERATING AND HOLDING SYSTEMS



HC 161 M/E

Regenerating and holding ventilated trolley

CONSTRUCTION FEATURES

- Tightness chamber with radiused corners
- Plastic bumpers
- Total thermic insulation with rock or glass wool
- Long lasting front and doors seals made up of food grade of high heat resistance
- Double door to reduce mostly the drop in temperature at opening
- Removable side racks to facilitate cleaning
- Internal drain for easy cleaning
- Ventilated heating provided by highefficiency protected heating elements
- Snap-shut doors
- Mounted on four 150mm diameter castors, two of wich with brake
- Ergonomic handles for pushing and guiding
- Easy access to facilitate maintenance and repair

FUNCTIONAL FEATURES

- Control panel of temperature, time and humidity electromechanical (M) or electronic with LCD and the storage of 20 programmes
- Simplified, user-friendly controls
- Operating temperature 30°C - 160°C
- Manual humidity vent
- Periodic reversal of direction of rotation of the fans for better air distribution
- Concealed water storage tank
- End-of-cycle buzzer
- Chamber with safety thermostat

STANDARD SUPPLY

- Removable GN1/1 or 600x400

OPTIONS & ACCESSORIES

- Core probe only for E version
- Automatic humidity vent (Climachef) only for E version
- Stainless steel plate baskets
- USB port saving device HACCP only for E version


Model	Overall dimensions (W x D x H) - mm	Trays capacity	Plates capacity Plates ø 230-310	Power kW	Power supply
HC 161 M/E	850 x 730 x 1760 h	16 x GN1/1 ø 600x400	32	6,4	3N AC 400V 50 Hz



M

Version **M** - With electromechanical control

- A** ON/OFF switch
- B** Mode selection switch for regenerating "R" on plate or keeping warm "M" on plate or tray
- C** Temperature regulation knob, with warning light to show that temperature has been reached
- D** Regenerating time regulation knob, with warning light indicating operation. By selecting "keeping warm" "M" the "time" function is cut out
- E** Humidity regulation knob, with warning light indicating operation

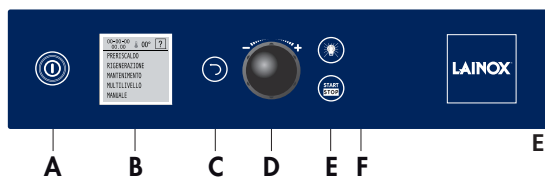

E

Version **E** - Electronic control and programmer

- A** ON/OFF switch
- B** Display
- C** Back to previous menu (BACK)
- D** Setting knob and select "ENTER"
- E** Push-button "START/STOP"
- F** Push-button cooking chamber lighting

Model	Rated voltage [Vac]	Total input [kW]	Amps. [A]	Connecting wire min. section (type H07 RN-F) [mm ²]
HC 161 M/E	3N - 400	6,5	9,4	5 x 1,5

TECHNICAL INSTALLATION DIAGRAM

HC 161 M/E

